

Asopen

5 open
5.70

UPGRADING January 31st 2008

From Jan 31st 2008, in agreement with the Group Finot Conq, it has been decided to bring the below modifications on Open 5.70 models :

Boom Vang :

Open 5.70 are now supplied with a boom vang located as per attached sketch :

The boom vang is supplied complete with :

- 1 X stitched strap (L= 0,43 m l=25 mm) fastened to the boom thanks to a 5 mm diam. pop rivet and washer.
- 1 X fiddle /423 carbo-cam/becket HARKEN # 2658 or similar
- 1X carbo block fiddle HARKEN # 2655 or similar
- 1 X Spectra or Dynema diam 4mm L=0,8 m
- 1 X Spectra or Dynema diam 5mm L=4,15 m

No further modification will be authorised ; main purpose of the boom vang is to maintain the tension of the main sail leech before the wind (specially when sheet is firmly eased out , which is not recommanded).


All Open 5.70 supplied before January 31st 2008 have to be fitted with the described boom vang.

Spinnaker hound lowered:

The pulley has to be located at 7050mm from the mast base as shown in attached sketch.

All boats supplied before January 31st 2008 have to be modified in order to match the class rules.

PHILEAS BOATS OPEN 5.70
31.01.2008
BOOM VANG

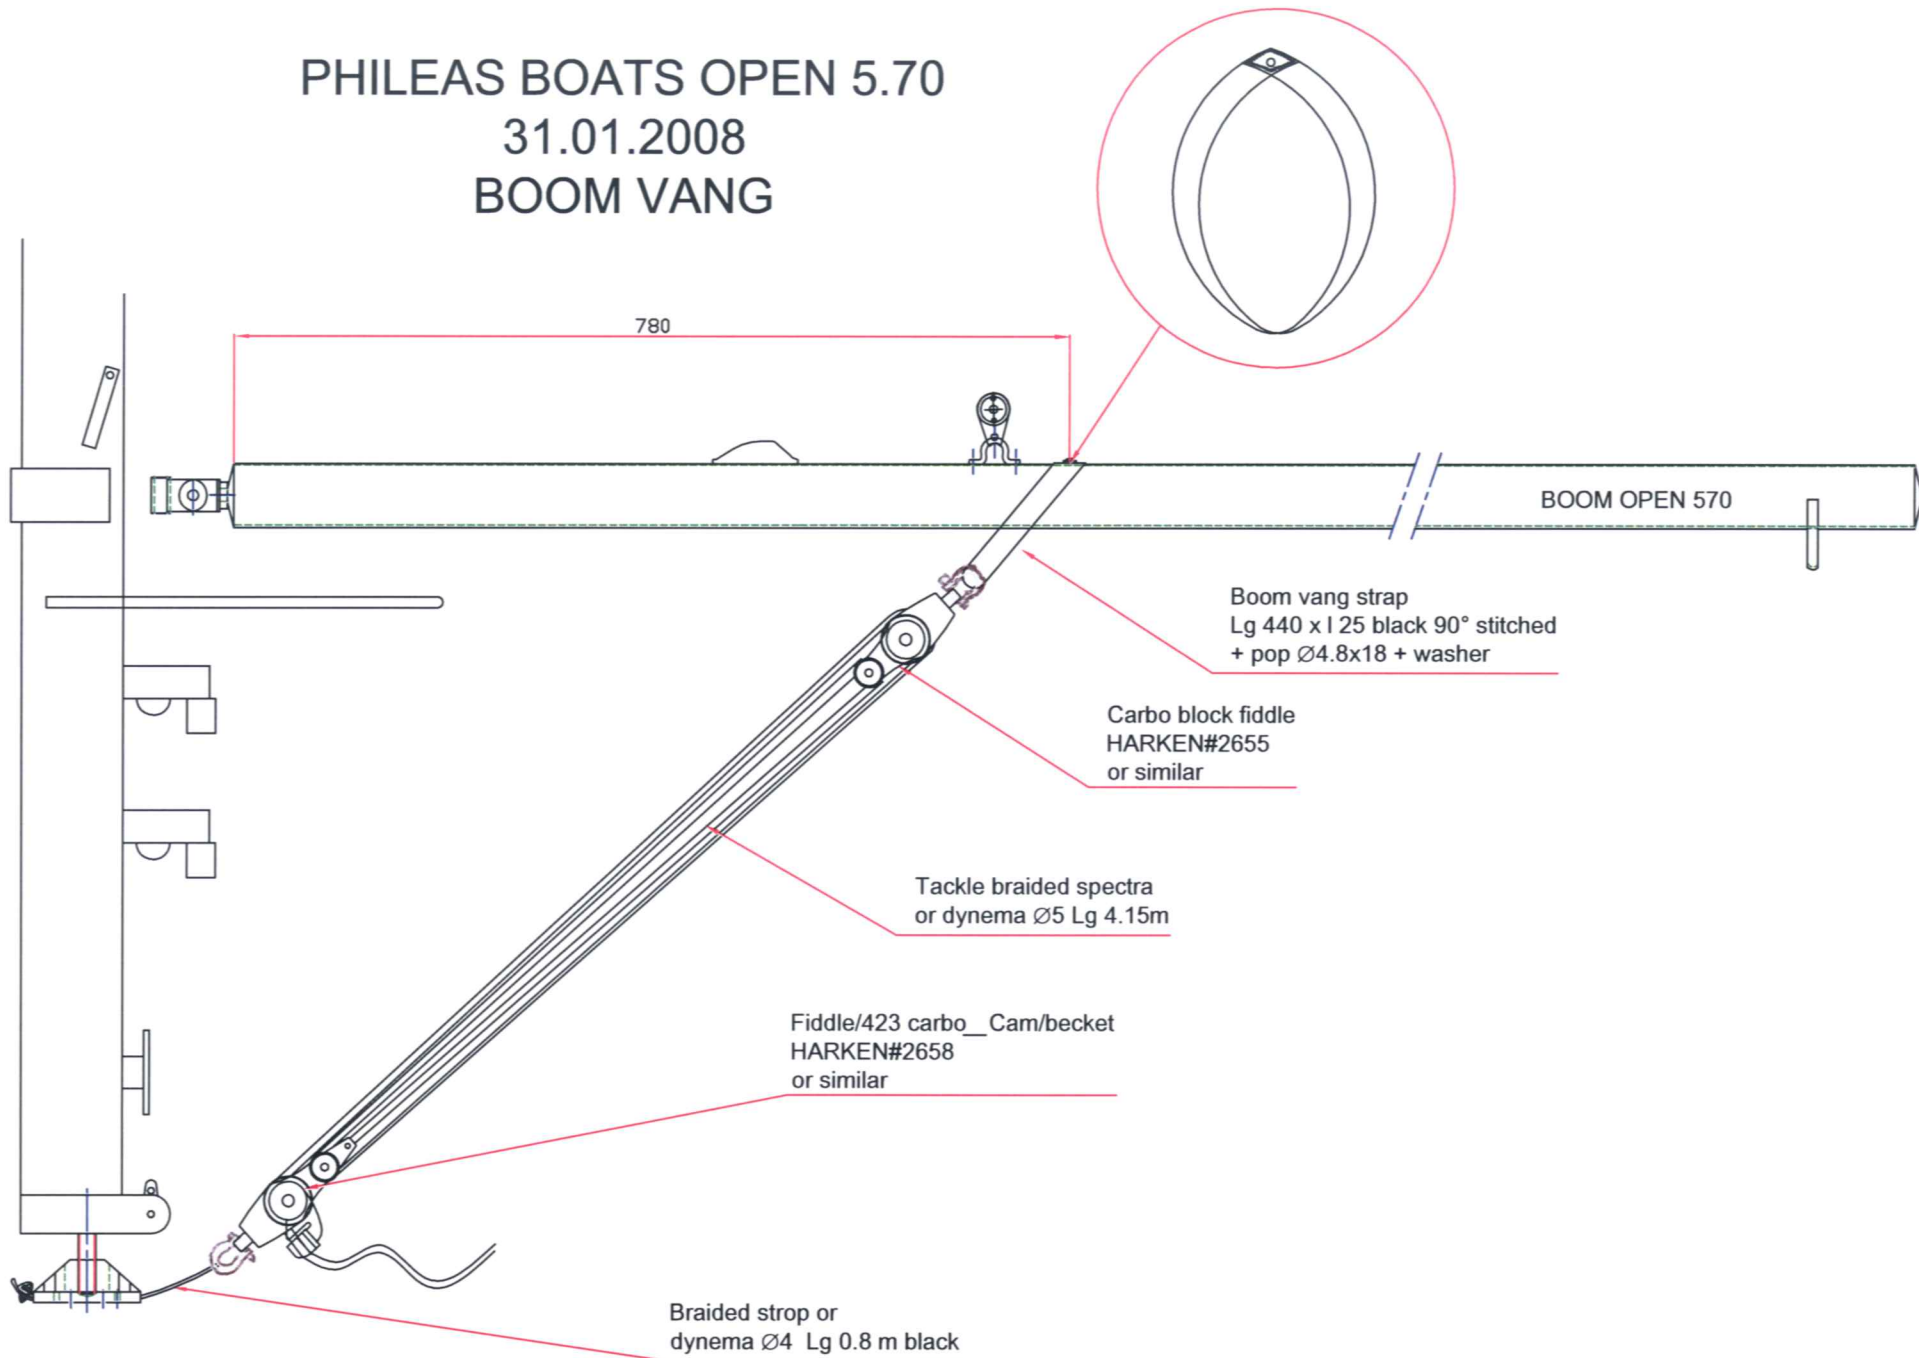

PHILEAS BOATS OPEN 570
31.01.2008
HOUND LOCATION

